

MediaMaster™ Video On Demand System

Serially-Controlled TV Tuner

MM-1270



Specifications

Height: 1.75 in (3.8 cm)

Width: 8.5 in (21.6 cm)

Depth: 6 in (15.3 cm)

Weight: 1.5 lbs (0.675 kg)


Power: 12 VDC at 0.4 A

Description

The serially-controlled TV tuner is typically used with video projectors (MM-1230 series) which lack built-in tuners. This allows a projector to be used as the primary display in a classroom rather than just as a secondary display for special purposes only.

Typical Application

It is common to use our dual Ethernet to serial converter (MM-1261) with this tuner and its associated projector, so you only need to run a single control cable to the projector mounting location. Here is a typical configuration:

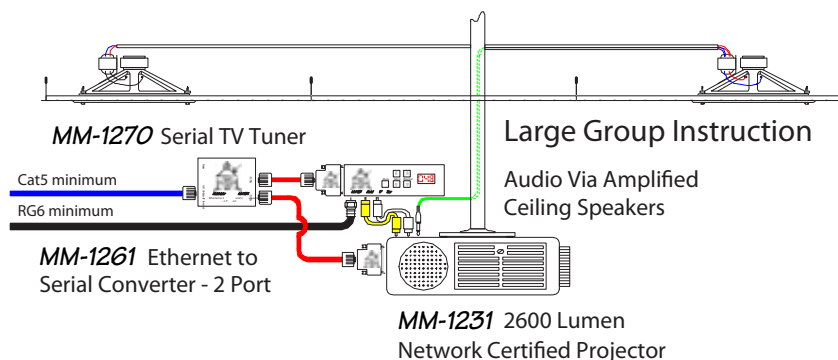

Features

- 125 channel CATV, HRC, IRC and over-the-air NTSC tuning
- Fast tuning
- Dual mono audio standard, stereo optional
- 64-level volume control plus mute

Rear Panel Connectors

- Antenna/cable 'F' type RF video input
- Composite video output, RCA connector
- Dual RCA audio outputs
- DB-9 male RS-232 for serial control
- 2.1 mm DC power jack



ETR... EDUCATIONAL TECHNOLOGY RESOURCES, INC.

1742 Church Street • Holbrook, New York 11741
tel 631.589.4300 • fax 631.589.4311 • www.etr-usa.com

Revised 2011.08.02