


# MediaMaster™ Video On Demand System

## RS-232 Display Control Cable for MM STB, Straight

MM-1273S

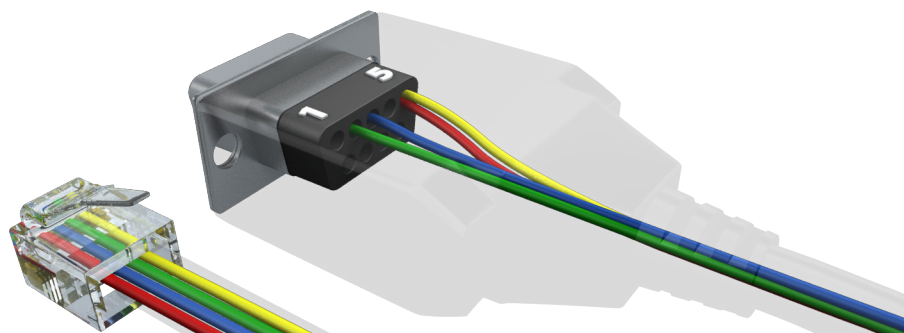

### Specifications

STB side: RJ-11/4  
 Display side: DE-9 (F or M)  
 Lengths: 3 ft (1 m)  
 7.5 ft (2.3 m)  
 custom avail.

### Description


This cable allows an MM-127x or MM-177x series set-top-box to act as an Ethernet to RS-232 serial translator, which allows the MediaMaster server to control a display that does not have built-in control via Ethernet. Since the STB is usually required anyway, this method reduces the per-display cost of the system.

This "S" variant uses straight-through wiring for controlling DTE devices. See the MM-1273C ("crossed") for the DCE variant.

DTE devices typically require a male cable, MM-1273SM, but this cable is also available in a female version, MM-1273SF.

Order as MM-1273SF-x or MM-1273SM-x, with x being feet. Standard lengths are 3 and 7.5 feet. Custom lengths are available.

### Typical Application

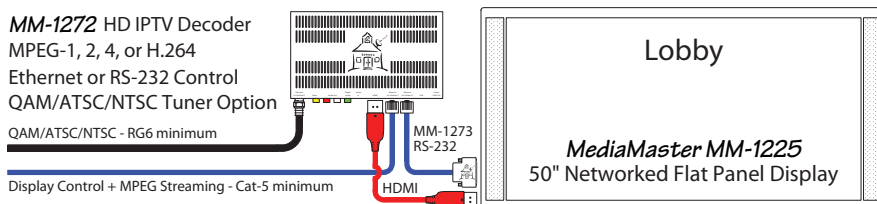

### Pinout

	RS-232 Pin	RJ-11/4 Pin	Wire Color
RxD	3	3	blue
TxD	2	2	green
GND	5	1	yellow
GND	5	4	red

The RJ-11 pin numbers are given left to right with the contacts facing you and the cable downward. Add 1 when DIYing with an RJ-11/6.

### Features

- Serial pass-thru operation allows a MediaMaster server to control a display via an MM-127x or MM-177x series set-top-box using the same cable used for IPTV and VoD.
- Custom lengths available for specific installation requirements
- Available in both male (MM-1273SM) and female (MM-1273SF) versions.

### Common Applications

MM-1273SM:

- Boxlight P7 projector
- Extron MLC-226 panel
- Sharp Professional
- SMART Tech. projector

MM-1273SF:

- Boxlight P3/P5 projector

*Check display before ordering!*



**MEDIAMASTER.COM, INC.**

1 Las Olas Circle • Unit 601 • Ft. Lauderdale, FL 33316  
 tel 631.589.4300 • fax 631.589.4311 • www.mediamaster.com

Revised 2023.09.07